
ModuNest Office Design
109 Brock Street, Barrie, L4N 2M3
Kayla Pantone
December 4, 2025

Sheet List		
Sheet Number	Sheet Name	Scale
ID	Cover Page	1/8" = 1'- 0"
ID-0	Site Plan	1/16" = 1'- 0"
ID-1	Existing Plan	1/2" = 1'- 0"
ID-1.1	Partition Plan	1/8" = 1'- 0" 1/8" = 1'- 0"
ID-1.2	Furniture Plan	1/8" = 1'- 0"
ID-1.3	Millwork & Furniture Schedules	N/A
ID-1.4	Reflected Ceiling Plan	1/2" = 1'- 0"
ID-1.5	Power and Communication Plan	1/2" = 1'- 0"
ID-2	Interior Elevations & Section	1/8" = 1'- 0"
ID-3	Details	1/8" = 1'- 0"
ID-4	Door & Window Schedule	1/8" = 1'- 0"

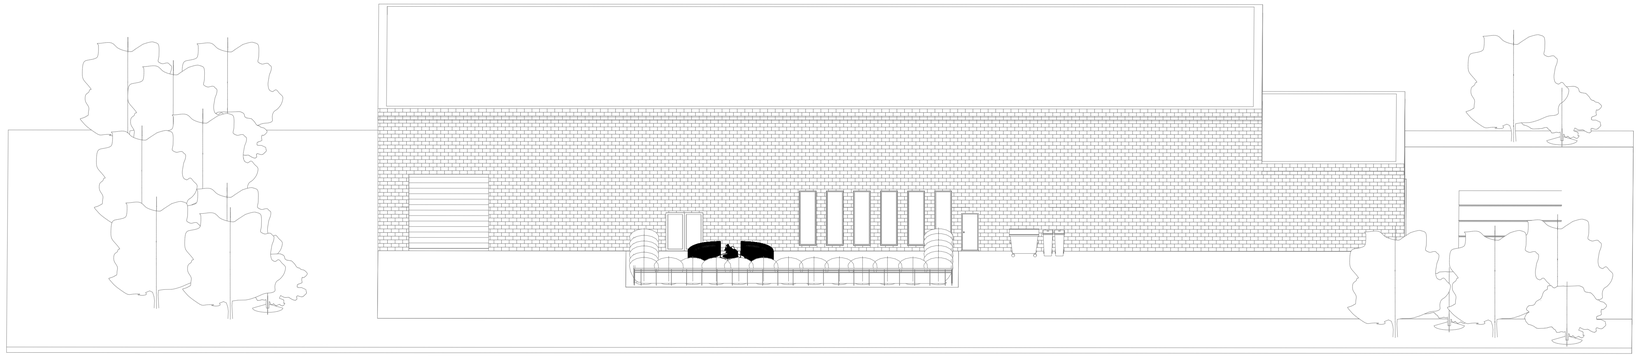

KAY & CO.
DESIGN STUDIO


Notes

ModuNest Office


Cover Page

Date	11/01/25
Drawn By	K.P.
Scale	

ID

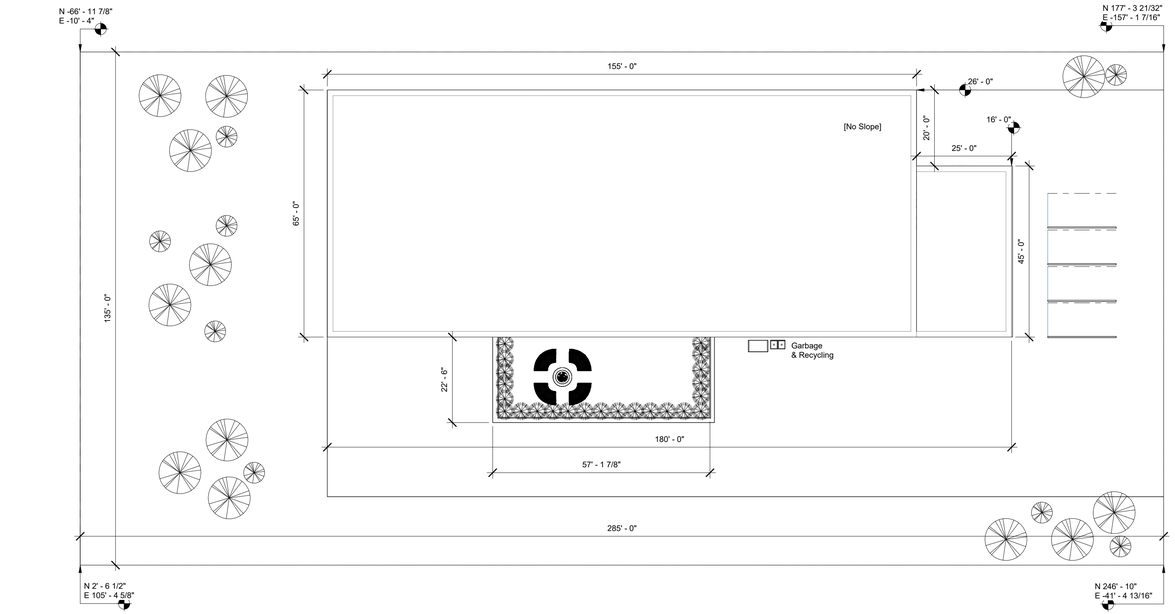

1 Site Plan
1/16" = 1'-0"

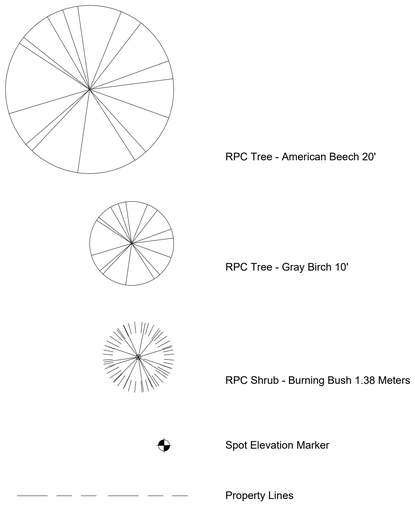

Site Plan Legend
1/4" = 1'-0"

Waste Management Plan

A waste management plan will be implemented to boost sustainability and environmental concerns.The first step will be to implement a waste sorting system, this will involve clearly labeling bins, for example, recycling, organics, landfill/garbage, confidential recycling for shredding, and electronic waste/printer consumables.

The bins will be placed around the office strategically to help the users follow this waste management plan. The common areas (kitchen/cafe,and lounge areas) will have recycling, organics and landfill/garbage. The workstations and meeting rooms will have smaller more aesthetic bins for recycling and landfill/garbage. There will be one designated area for confidential recycling for shredding, and electronic waste/printer consumables.

Outside there will be an area where garbage will be kept for pickup and sorted accordingly as per the implemented waste management plan. All bins will be emptied for pickup days, in Barrie, where ModuNest is located, garbage pickup is every other week, and recycling is every week, so on the designated day, all bins will be emptied. For electronic waste/printer consumables, this needs to to be returned via a manufacturer recycling program.

KAY & CO.
DESIGN STUDIO

Notes


1. All work shall comply with the Ontario Building Code (OBC), local municipal bylaws, zoning regulations, and all applicable standards.
2. Verify all dimensions, property lines, easements, setbacks, and grades on site prior to construction.
3. Contractor shall locate and protect all existing utilities before excavation (gas, electrical, water, sewer, telecom).
4. Report any discrepancies between drawings, site conditions, or survey data to the consultant before proceeding.
5. Do not scale drawings; use figured dimensions only.
Trucks will be able to go around the side of the building to drop off/pick up from the loading dock at the back of the building.

ModuNest Office


Site Plan

Date	11/01/25
Drawn By	K.P.
Scale	As indicated

ID-0

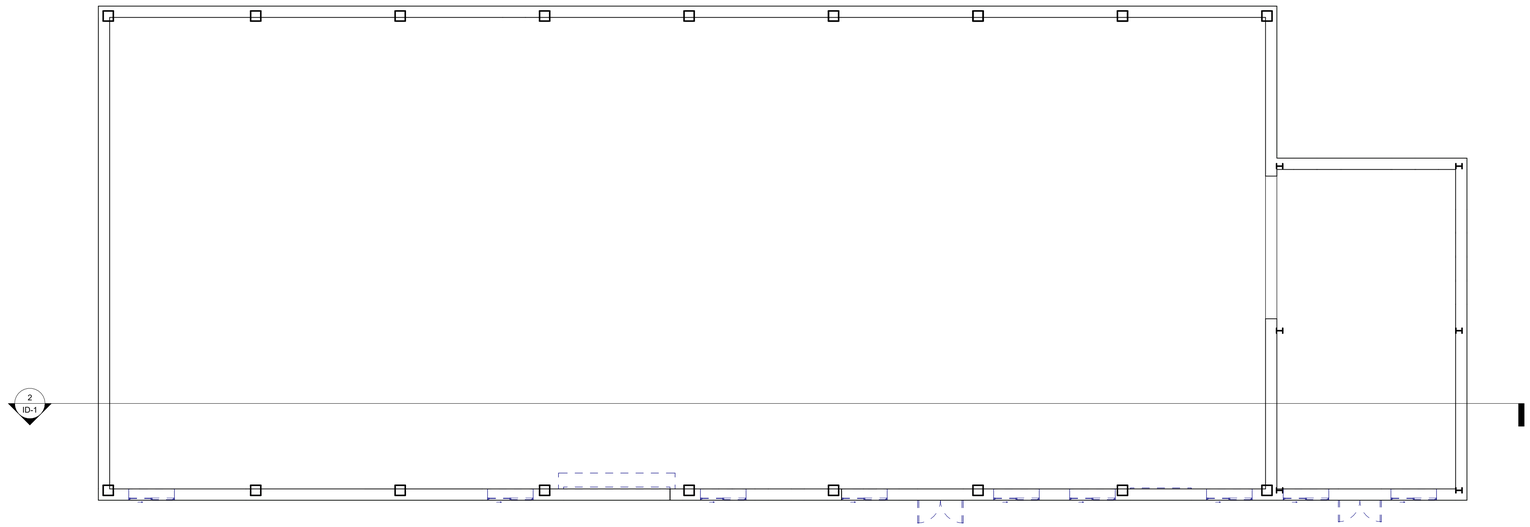

1 Existing Plan
1/8" = 1'-0"

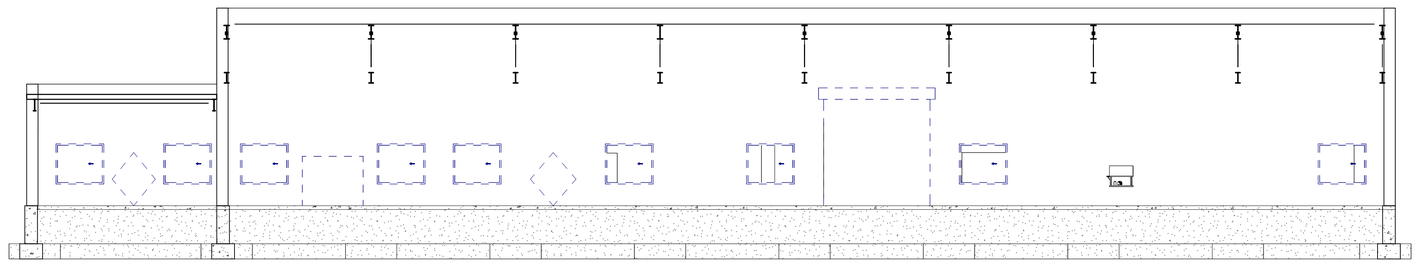

2 Section 3
1/8" = 1'-0"

KAY & CO.
DESIGN STUDIO

Notes


1. Existing Plan is based on site measurements and/or available drawings; contractor shall verify all dimensions and conditions on site.
2. Any discrepancies between drawings and actual conditions must be reported to the architect/designer before proceeding.
3. Locations of existing walls, doors, windows, structures, and utilities are shown schematically and must be field-verified.

ModuNest Office


Existing Plan

Date	11/01/25
Drawn By	K.P.
Scale	1/8" = 1'-0"

ID-1

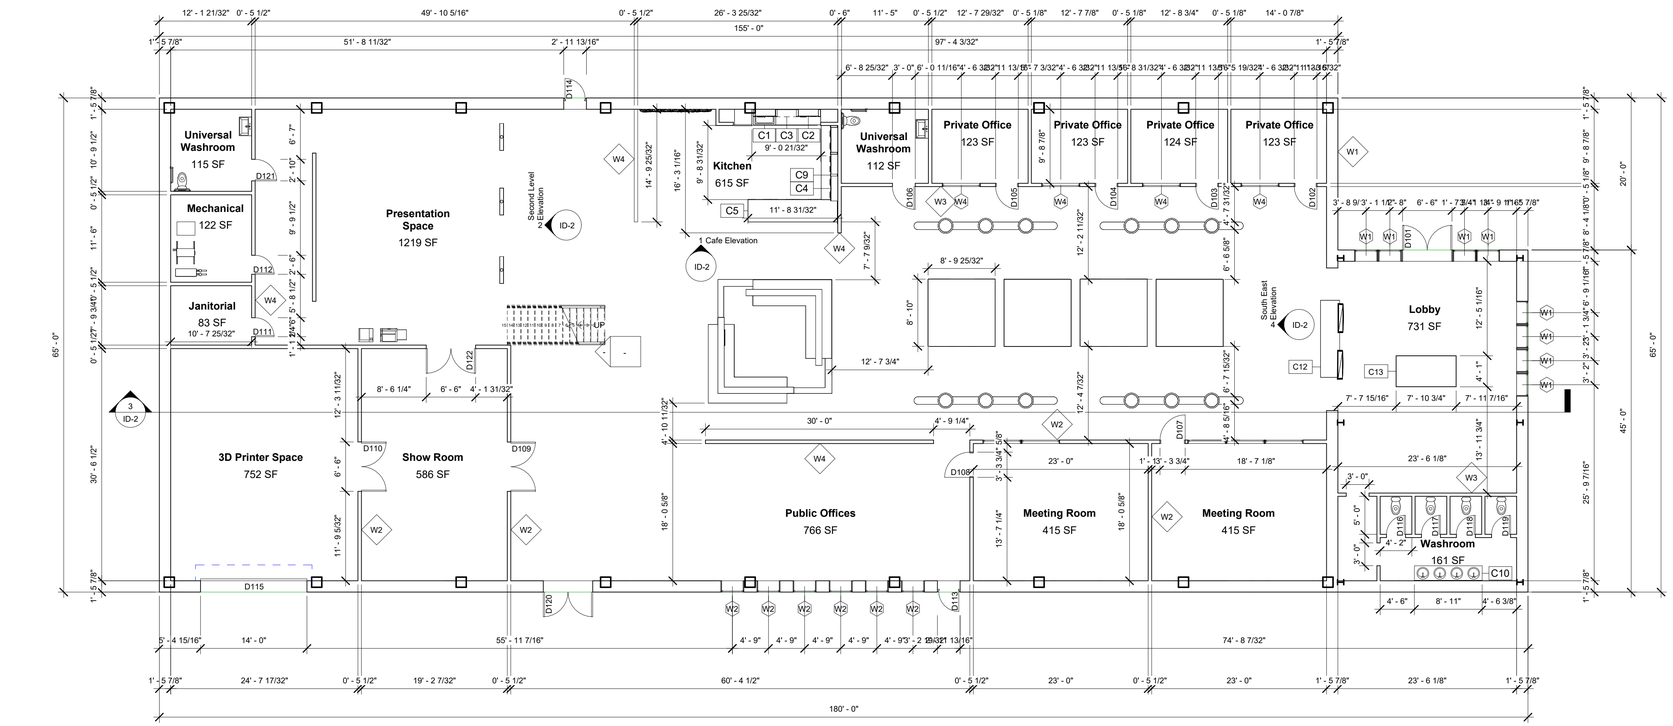

1 Partition Plan
1/8" = 1'-0"

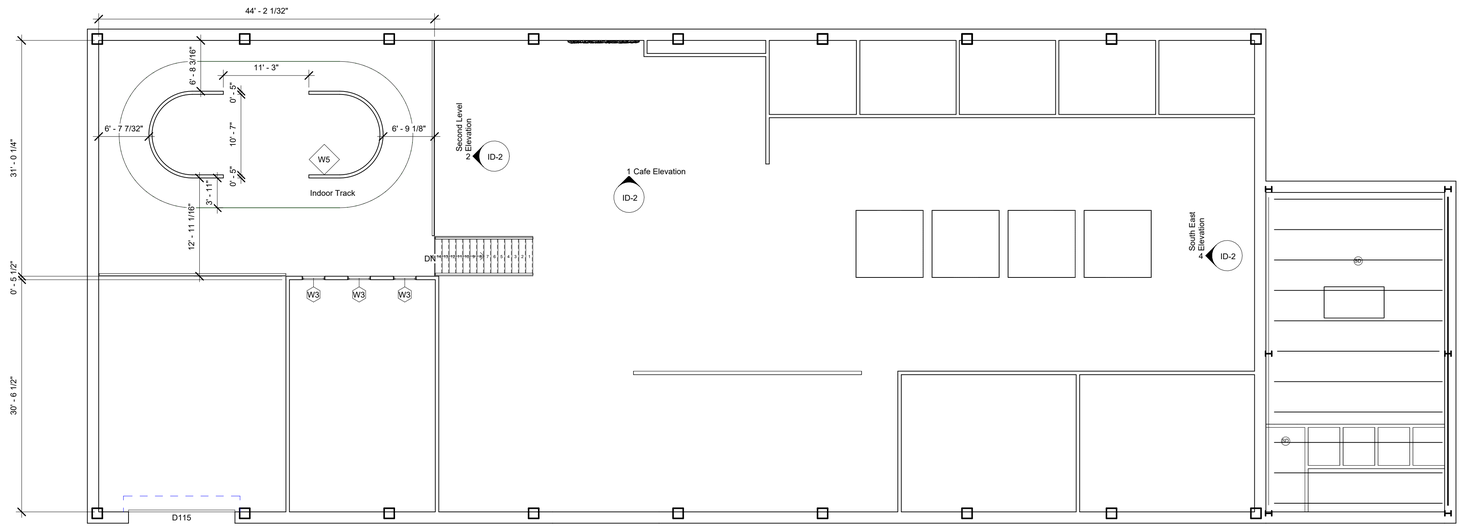

4 Partition Plan - 2nd Level
1/8" = 1'-0"

KAY & CO.
DESIGN STUDIO

Notes


1. All partition construction shall conform to the local building code, fire code, and authority having jurisdiction.
2. Contractor shall verify all existing site conditions, dimensions, and alignment of structural elements before installing partitions.
3. All dimensions are to face of stud unless otherwise noted.
4. All partitions to be built according to the plan or details referenced on drawings.
5. Fire-rated walls shall be constructed per ULC / UL assemblies indicated.
6. Install acoustical insulation in partitions where indicated.
7. Coordinate door and frame sizes and locations with door schedule and elevations.
8. Coordinate partition layout with mechanical, electrical, plumbing, fire protection, and ceiling design.
9. Confirm space for ductwork, plumbing risers, conduit runs, and electrical panels before closing walls.

ModuNest Office


Partition Plan

Date	11/01/25
Drawn By	K.P.
Scale	1/8" = 1'-0"

ID-1.1

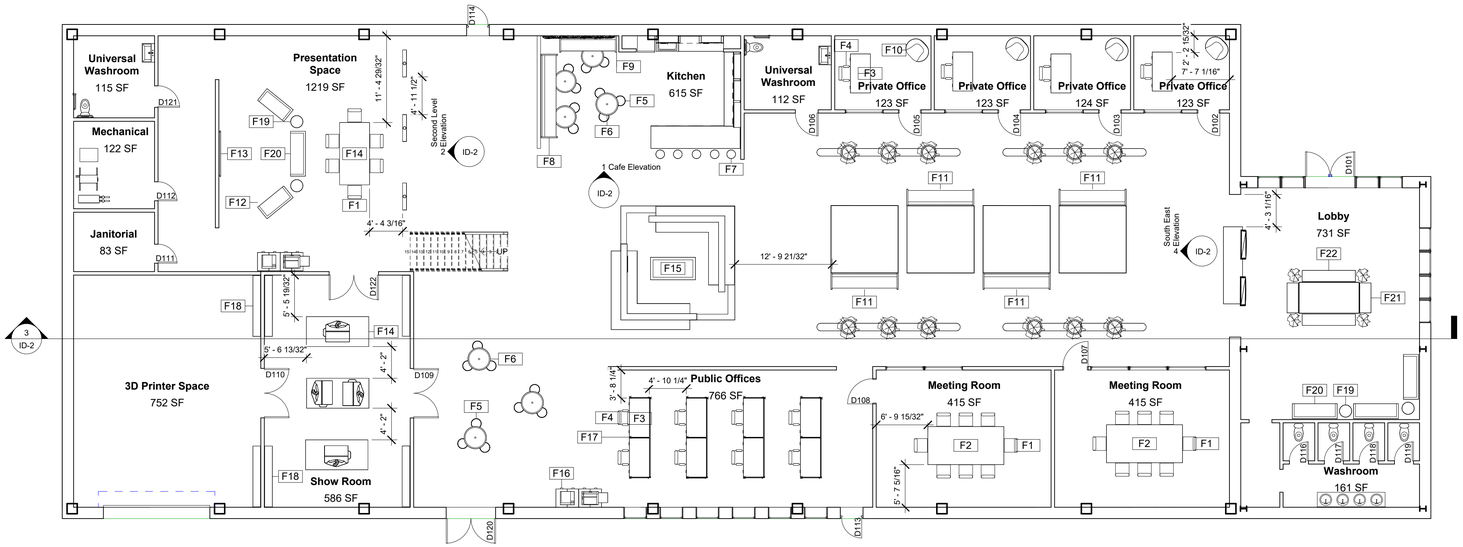

1 Furniture Plan
1/8" = 1'-0"

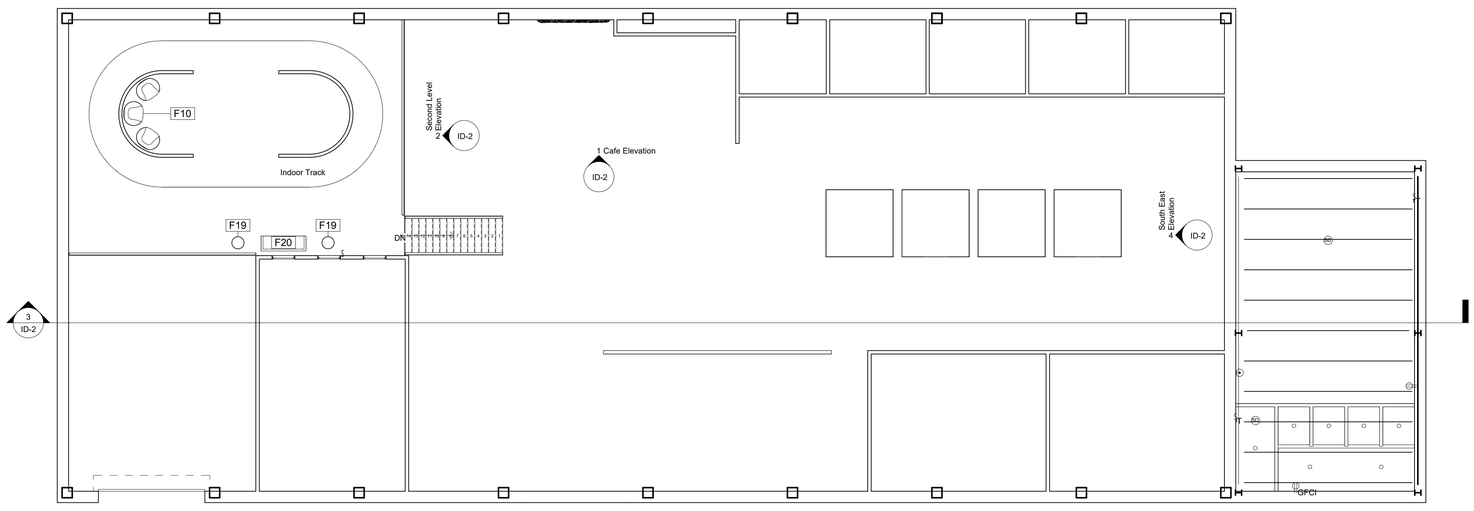

4 Furniture Plan - 2nd Level
1/8" = 1'-0"

KAY & CO.
DESIGN STUDIO

Notes

1. Contractor and installer shall verify all existing site dimensions and conditions before placing furniture.
2. Notify the designer/architect of any discrepancies before installation.
3. All furniture and equipment shall match the Furniture Schedule. Substitutions must be approved by the architect/designer prior to ordering.
4. All furniture finishes and fabrics shall meet project performance requirements (e.g., durability, cleanability, flame resistance).
5. Verify power, data, and communication outlet locations before placing furniture.
6. Ensure furniture does not block access to outlets, thermostats, switches, fire alarm devices, or mechanical equipment.
7. Maintain all barrier-free clearances as per building code (e.g., maneuvering space at desks, seating, corridors).
8. Confirm circulation paths remain unobstructed (hallways, exits, door swings).
9. Contractor to coordinate furniture delivery schedule with building access requirements.
10. Protect existing finishes during moving and installation.
11. emove all packaging and debris from site after installation.
12. Installer to ensure all furniture is level, secure, and functioning properly.
13. Contractor to provide a walk-through with the designer/owner after installation.

ModuNest Office

Furniture Plan

Date	11/01/25
Drawn By	K.P.
Scale	1/8" = 1'-0"

ID-1.2

Casework Schedule							
Type Mark	Description	Width	Height	Depth	Finish	Count	Comments
C1	Counter Top (Sink Hole)	2' - 0 19/32"	2' - 5 17/32"	2' - 0 19/32"		1	
C2	Upper Cabinet	2' - 7 1/2"	2' - 4 11/32"	0' - 11 13/32"	Vinyl	3	
C3	Upper Shelving	2' - 6"	2' - 4"	0' - 11 13/16"	Vinyl	1	
C4	Upper Cabinet	3' - 3 3/8"	2' - 4 11/32"	0' - 11 13/32"		2	
C5	Counter Top		2' - 11 7/16"	<varies>		2	
C6	Base Cabinet	2' - 11 7/16"	2' - 9 27/32"	1' - 11 5/8"		3	
C7	Base Cabinet Shelving	2' - 11 7/16"	2' - 9 27/32"	1' - 11 5/8"		6	
C8	Counter Top		2' - 11 7/16"	2' - 0 19/32"		1	
C9	Unit Filler	0' - 2 15/16"	2' - 4 1/2"	0' - 11 13/16"	Vinyl	7	
C10	Washroom Sinks		2' - 9 15/32"	1' - 11 5/8"		1	
C11	Corner Base Cabinet	2' - 11 7/16"	2' - 9 27/32"	1' - 11 5/8"	Vinyl	1	

Furniture Schedule				
Type Mark	Description	Count	Dimension	Comments
		64		n/a dimensions, see packaging
F1	Office Chair	22		n/a dimensions, see packaging
F2	Meeting Table	2	2' - 5"	
F3	Office Desk	12		n/a dimensions, see packaging
F4	Office Chair	12		n/a dimensions, see packaging
F5	Round Ottoman	18		n/a dimensions, see packaging
F6	Round Dining Table	7		n/a dimensions, see packaging
F7	Bar Stool	5		n/a dimensions, see packaging
F8	Booth Seating	1	11' - 0"	
F9	Booth Seating	1	7' - 6"	
F10	Lounge Sofa Chair	7		n/a dimensions, see packaging
F11	Booth Seating	4	8' - 10"	
F12	Sofa	2	4' - 5"	
F13	Television	1	6' - 0"	
F14	Office Table	4	8' - 2"	
F15	Coffee Table	1	5' - 10"	
F16	Filing Cabinets	8	1' - 5"	
F17	Gallery Screen with Glass, End Mounted Single	16		n/a dimensions, see packaging
F18	Shelving	6	8' - 0"	
F19	Circle Side Table	6		n/a dimensions, see packaging
F20	Sofa	5	<varies>	
F21	Bench	2	3' - 11"	
F22	Bench	2	7' - 0"	

KAY & CO.
DESIGN STUDIO


Notes

ModuNest Office

Millwork & Furniture Schedules

Date	11/01/25
Drawn By	K.P.
Scale	


ID-1.3

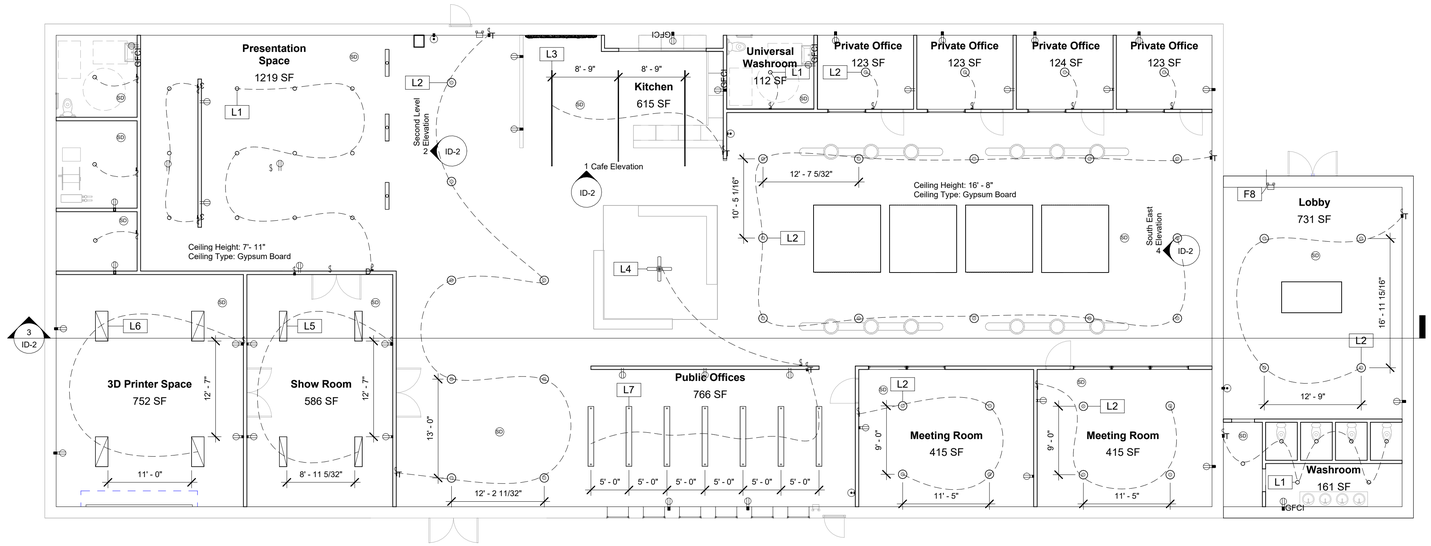

1 Reflected Ceiling Plan
1/8" = 1'-0"

Tag	Symbol	Description
L1		Recessed Pot Lighting
L2		Pendant Lighting
L3		Linear Recessed Lighting 150mm
L4		Ceiling Fan with Lighting
L5		Plain Recessed Light Fixture 300x1200
L6		Plain Recessed Light Fixture 500x1200
L7		Suspended Linear Lighting 2400mm
L8		Emergency Lighting

Lighting Legend
1/4" = 1'-0"

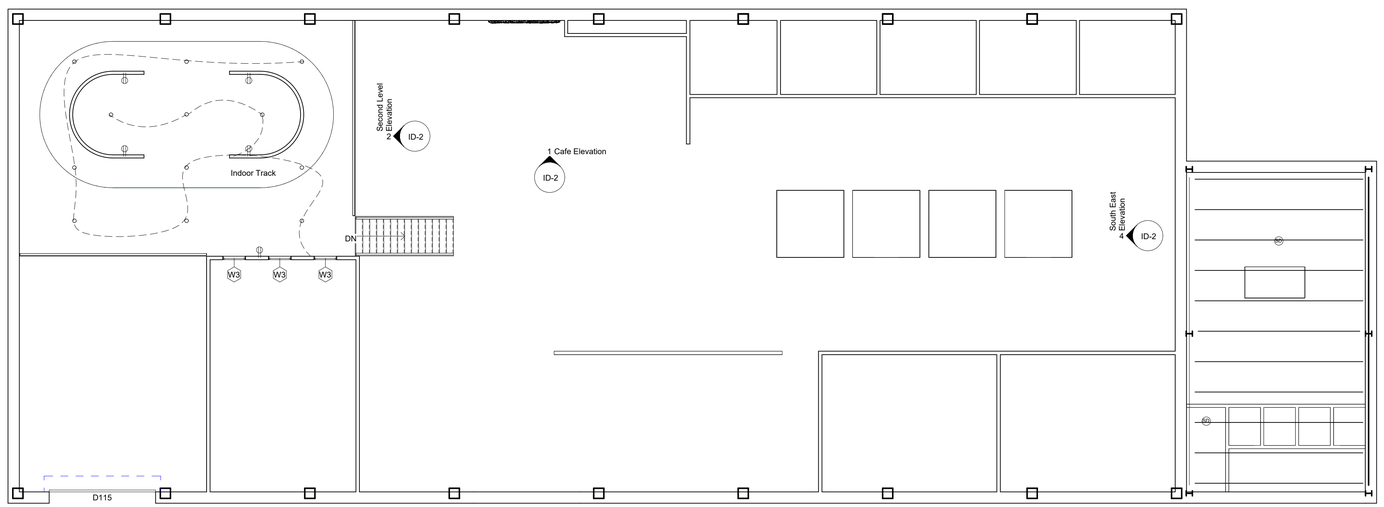

2 Reflected Ceiling Plan 2nd Level
1/8" = 1'-0"

Notes

1. Contractor shall verify all existing site conditions prior to installation.
2. Dimensions, heights, and locations of ceiling elements must be coordinated on site.
3. All trades shall coordinate ceiling installations (architectural, electrical, mechanical, sprinkler, IT, AV).
4. Install gypsum board per manufacturer's specifications.
5. All ceiling heights (AFF) shown on the plans refer to finished ceiling height unless noted otherwise.
6. Maintain required clearances for access to mechanical/electrical equipment above ceiling.
7. Provide access panels as required for maintenance of concealed equipment.
8. Coordinate light fixture types, mounting heights, and distribution with electrical drawings.
9. Ensure proper alignment of lighting with ceiling grids, architectural features, and furniture layout.
10. Recessed fixtures to be supported independently from the ceiling system unless manufacturer allows otherwise.
11. Sprinkler heads to be centered in ceiling tiles unless otherwise noted.
12. Fire alarm devices, smoke detectors, and strobes to comply with code spacing and requirements.
13. Coordinate speakers, cameras, sensors, projectors, and AV devices with the electrical and AV consultants.


KAY & CO.
DESIGN STUDIO

ModuNest Office

Reflected Ceiling Plan

Date	11/01/25
Drawn By	K.P.
Scale	As indicated


ID-1.4

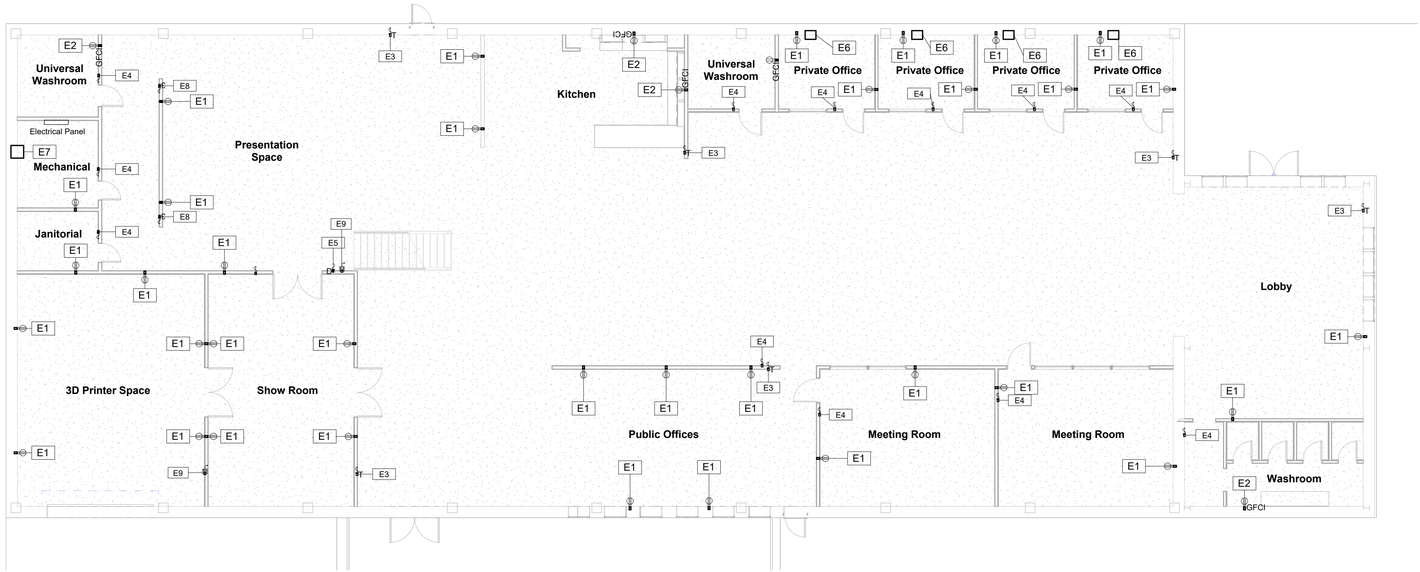

1 Power Plan
1/8" = 1'-0"

Tag	Symbol	Description
E1		Duplex Receptacle
E2	GFCI	GFCI Duplex Receptacle
E3	T	Timer Light Switch
E4		Single Light Switch
E5	D	Dimmer Light Switch
E6		Ethernet Switch
E7		Distribution Board
E8	3	Three Way Light Switch
E9	M	Microphone

Symbol Legend
1/4" = 1'-0"

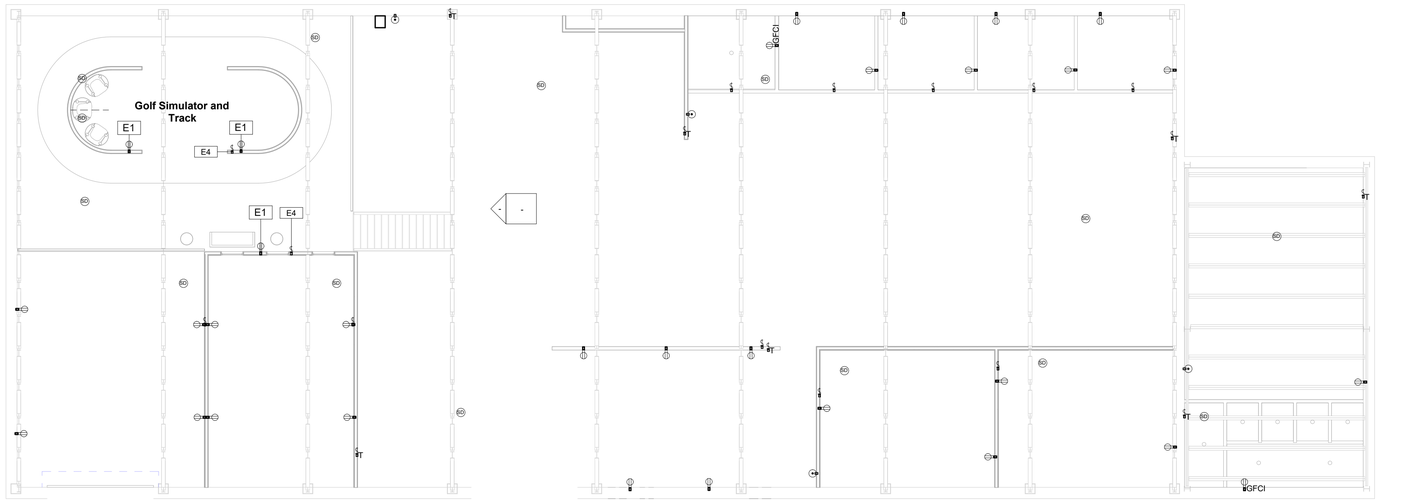

2 Power Plan 2nd Level
1/8" = 1'-0"

Electrical Schedule			
Type Mark	Description	Voltage	Count
E1	Duplex Receptacle	240 Volts	66
E2	GFCI Duplex Receptacle	240 Volts	7
E3	Timer Light Switch	240 Volts	5
E4	Single Light Switch	240 Volts	16
E5	Dimmer Light Switch	240 Volts	1
E6	Ethernet Switch	48V DC	4
E7	Distribution Board	240 Volts	1
E8	Three Way Light Switch	240 Volts	2
E9	Microphone	N/A	2

Electrical Schedule
1/4" = 1'-0"

KAY & CO.
DESIGN STUDIO

Notes


1. Contractors to verify all existing site conditions prior to start of work.
2. Dimensions and locations of all devices to be confirmed on site.
3. All equipment to be installed per manufacturer's instructions.
4. All circuits to be labeled and identified on panelboard.
5. All breakers to match existing panel type and interrupting rating.
6. All receptacle heights to follow accessibility requirements unless noted otherwise.
7. Provide GFCI-protected receptacles in washrooms, kitchens, outdoors, and areas required by code.
8. All lighting fixtures to be LED unless otherwise noted.
9. Emergency lighting and exit signs to be connected to emergency power or battery backup as required by code.
10. Provide lighting controls, occupancy sensors, and daylight sensors per energy code.
11. Coordinate fixture mounting heights and locations with reflected ceiling plan (RCP).
12. Fire alarm system installation shall conform to ULC-S524.
13. Verify strobe coverage, horn locations, and corridor requirements.
14. Smoke and heat detector locations to follow code spacing and manufacturer instructions.
15. Provide conduits and backboxes for data outlets as indicated.
16. Electrical contractor to provide power to all mechanical equipment unless noted otherwise.
17. Electrical contractor to perform insulation resistance testing on circuits prior to energizing.
18. Verify proper operation of GFCI/AFCI devices.

ModuNest Office


Power and Communication Plan

Date	12/04/25
Drawn By	K.P.
Scale	As indicated


ID1.5

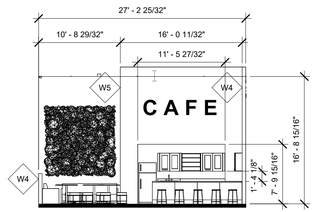


1 Cafe Elevation
1/8" = 1'-0"

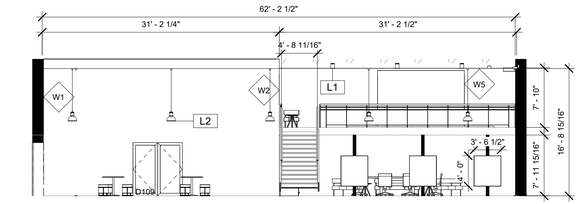

2 Second Level Elevation
1/8" = 1'-0"

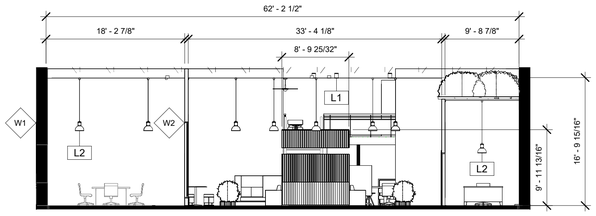

4 South East Elevation
1/8" = 1'-0"

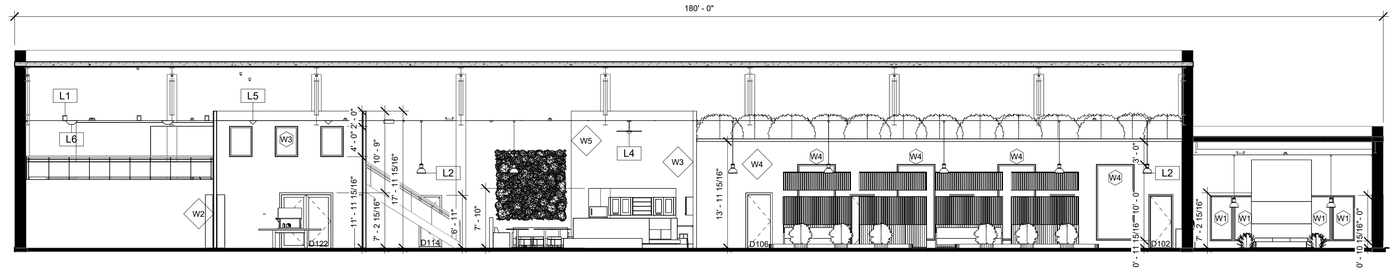

3 South-West Section
1/8" = 1'-0"

KAY & CO.
DESIGN STUDIO

Notes

ModuNest Office


Interior Elevations & Section

Date	11/01/25
Drawn By	K.P.
Scale	1/8" = 1'-0"

ID-2

Exterior Wall - W1

1. Finish: 7 5/8" Concrete Masonry
2. Thermal Layer: 3" Air
3. Membrane Layer: Air Filtration Barrier
4. Subsrate: 3/4" Plywood, Sheathing
5. Strcuture: 6" Metal Stud Layer
7. Membrane Layer: Vapour Retarder
8. Finish: 1/2" Gympsum Wall Board

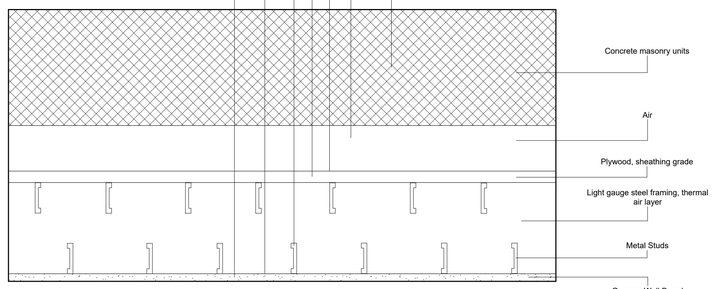


Exterior Wall
3" = 1'-0"

Fire Rated Wall - W2

1 Hour Fire Rating

1. Finish: 5/8" Type X Gypsum Board
2. Structure: 3 5/8" Metal Stud Layer
3. Finish: 5/8" Type X Gypsum Board
4. Finish: 5/8" Type X Gypsum Board

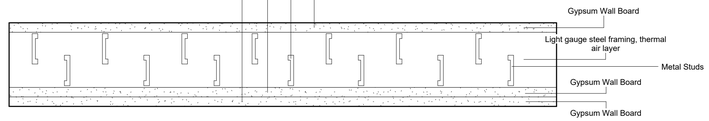


Fire-Rated Wall
3" = 1'-0"

Acoustic Wall - W3

1. Finish: 1/2" Gypsum Board
2. Structure: 5/8" Metal Stud Layer
3. Thermal/Air Layer: 3" Thermafiber
4. RC-1 channel
5. Finish: 5/8" Gypsum Board


STC Rating is 54

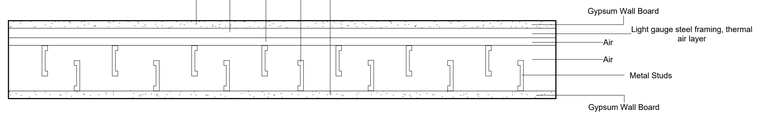

Acoustic Wall
3" = 1'-0"

Typical Wall - W4

1. Finish: 5/8" Gypsum Board
2. Structure: 4 1/4" Metal Stud Layer
3. Finish: 5/8" Gypsum Board

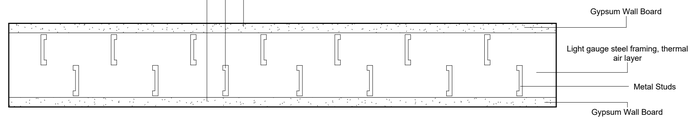

Typical Wall
3" = 1'-0"

KAY & CO.
DESIGN STUDIO


Notes

ModuNest Office

Details

Date	11/01/25
Drawn By	K.P.
Scale	3" = 1'-0"

ID-3

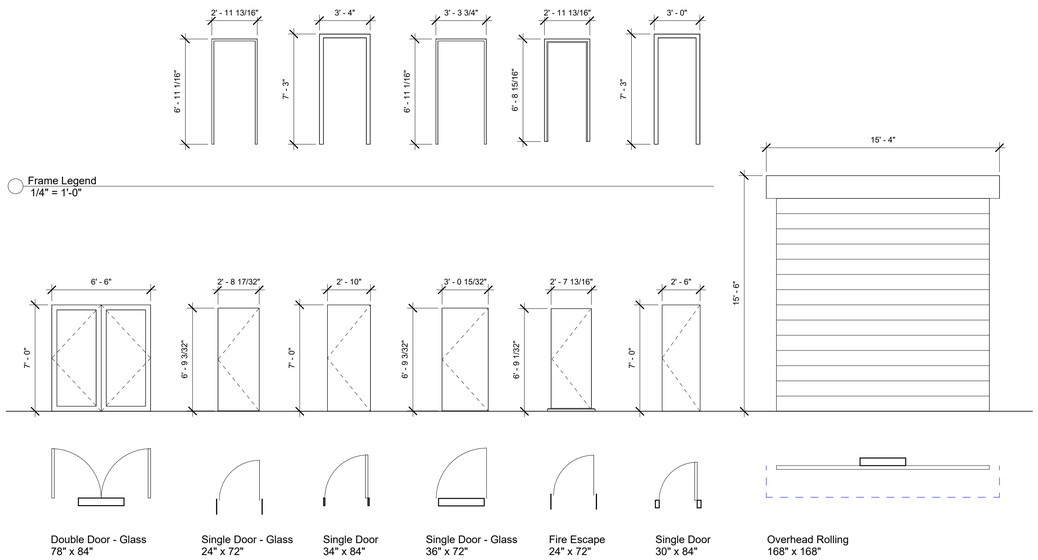

Frame Legend
1/4" = 1'-0"

Double Door - Glass
78" x 84"

Single Door - Glass
24" x 72"


Single Door
34" x 84"

Single Door - Glass
36" x 72"

Fire Escape
24" x 72"

Single Door
30" x 84"

Overhead Rolling
168" x 168"

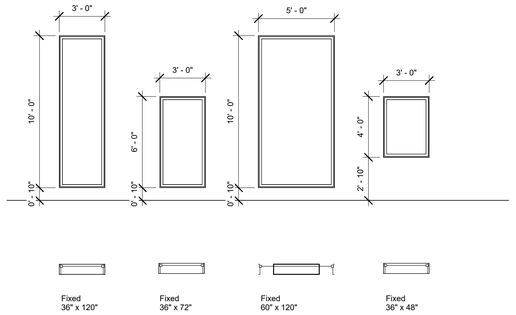

Fixed
36" x 120"

Fixed
36" x 72"

Fixed
60" x 120"

Fixed
36" x 48"

Door Legend
1/4" = 1'-0"

Window Legend
1/4" = 1'-0"

Door Schedule

Mark	Family	Type	Door		Fire Rating	Frame Finish	Hardware	Comments
			Material	Finish				
101	Door-Double-Glass	78" x 84"	Glass	Wood	N/A	Black Steel	Stainless Steel	
102	Doors_Concept_IntSgl	910x2110mm	Frosted Glass	Wood	N/A	Black Steel	Stainless Steel	
103	Doors_Concept_IntSgl	910x2110mm	Frosted Glass	Wood	N/A	Black Steel	Stainless Steel	
104	Doors_Concept_IntSgl	910x2110mm	Frosted Glass	Wood	N/A	Black Steel	Stainless Steel	
105	Doors_Concept_IntSgl	910x2110mm	Frosted Glass	Wood	N/A	Black Steel	Stainless Steel	
106	Single-Flush	36" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
107	Doors_Concept_IntSgl	1010x2110mm	Glass	Wood	N/A	Black Steel	Stainless Steel	
108	Doors_Concept_IntSgl	1010x2110mm	Glass	Wood	N/A	Black Steel	Stainless Steel	
109	Door-Double-Glass	78" x 84"	Glass	Wood	N/A	Black Steel	Stainless Steel	
110	Door-Double-Glass	78" x 84"	Glass	Wood	N/A	Black Steel	Stainless Steel	
111	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
112	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
113	Doors_ExtSgl_Flush_Fire_Escape	910x2110mm	Steel	Steel	1 hour	Black Steel	Stainless Steel	
114	Doors_ExtSgl_Flush_Fire_Escape	910x2110mm	Steel	Steel	1 hour	Black Steel	Stainless Steel	
115	Door-Overhead-Rolling	168" x 168"	Steel	Steel	N/A	Black Steel	Stainless Steel	
116	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
117	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
118	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
119	Single-Flush	30" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
120	Door-Double-Glass	78" x 84"	Glass	Wood	N/A	Black Steel	Stainless Steel	
121	Single-Flush	34" x 84"	Wood	Wood	N/A	Black Steel	Stainless Steel	
122	Door-Double-Glass	78" x 84"	Glass	Wood	N/A	Black Steel	Stainless Steel	
123	Doors_Handle_Pull_2	Metal_Handle						
126	Doors_Handle_Pull_2	Metal_Handle						

Window Schedule

Type Mark	Type	Width	Height	Finish	Glazing	Operation	Count	Comments
					Type			
W1	Fixed	3' - 0"	6' - 0"	Vinyl	Double-Pane	Fixed	8	
W2	Fixed	3' - 0"	10' - 0"	Vinyl	Double-Pane	Fixed	6	
W3	Fixed	3' - 0"	4' - 0"	Vinyl	Double-Pane	Fixed	3	
W4	Fixed	5' - 0"	10' - 0"	<varies>	<varies>	Fixed	9	

KAY & CO.
DESIGN STUDIO

Notes

ModuNest Office

Door & Window Schedule

Date	11/01/25
Drawn By	K.P.
Scale	1/4" = 1'-0"

ID-4